

C18


Force Transducer

Special features

- Compressive force transducer
- Nominal (rated) forces 10 kN, 20 kN, 50 kN, 100 kN, 200 kN, 300 kN, 500 kN, 1 MN, 2 MN, 3 MN, 4,5 MN
- Compact size
- Low weight
- Force introduction parts also included
- Possible classification with DKD calibration certificate acc. to ISO376: Class 0.5



Schematic diagram C18 force transducer

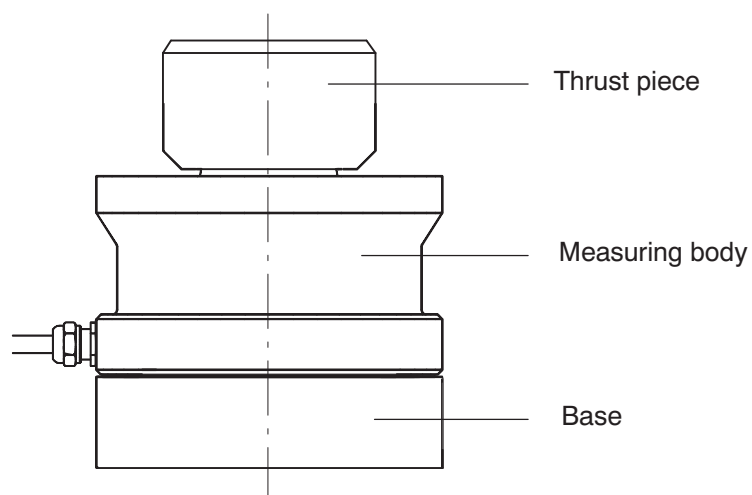

Specifications


Type	C18					
Data according to VDI 2638 standards						
Nominal (rated) force	F _{nom}	kN	10 – 200	300	500 – 1000	2000 – 4500
Class according to ISO 376 (0.2F _{nom} to F _{nom})			0.5			
Nominal (rated) sensitivity	C _{nom}	mV/V	2			
Rel. sensitivity deviation	d _C	%	0.1			
Rel. zero signal deviation (zero signal tolerance)	d _{s,o}	%	1			
Rel. zero error ¹⁾	f _o	%	0.012	0.024		
Rel. range (0.2F _{nom} to F _{nom}) at: unchanged mounting position ¹⁾ various mounting positions ¹⁾	b _{rg}	%	0.04			
	b _{brv}	%	0.08			
Relative reversibility error (0.2F _{nom} to F _{nom}) ¹⁾	u	%	0.08			
Linearity deviation	d _{lin}	%	0.05			
Effect of temperature on sensitivity/10 K rel. to sensitivity	TK _C	%	0.01			
Effect of temperature on zero signal/10 K rel. to sensitivity	TK ₀	%	0.01			
Effect of lateral forces (lateral force 10 % F _{nom}) ²⁾	d _Q	%	0.035	0.1	0.15	
Effect of eccentricity/mm	d _E	%	0.02			
Rel. creep over 30 mins	d _{cr,F+E}	%	0.03			
Input resistance	R _e	Ω	4450 ± 100			
Output resistance	R _a	Ω	4010 ± 2			
Isolation resistance	R _{is}	Ω	> 50x10 ⁹			
Reference excitation voltage	U _{ref}	V	5			
Operating range of the excitation voltage	B _{U,G}	V	5 to 30			
Carrier frequency of the excitation voltage		Hz	≤ 600			
Nominal (rated) temperature range	B _{t,nom}	°C	+10 to +40			
Operating temperature range	B _{t,G}	°C	-30 ... +80			
Storage temperature range	B _{t,S}	°C	-50 ... +85			
Reference temperature	t _{ref}	°C	+22			
Max. operating force	(F _G)	%	170			150
Limit force	(F _L)	%	170			150
Breaking force	(F _B)	%	400			320
Static lateral limit force	(F _Q)	%	0.3·F _{nom} ; (to F _Z ≤ 0.5F _{nom}) 0.5·(F _{nom} -0.8·F _Z); (for F _Z > 0.5F _{nom}) (F _Z = force in direction of measurement)			

¹⁾ Class 0.5 according to ISO 376, classification guaranteed only in conjunction with a DKD calibration certificate.

²⁾ relative to a force introduction point on the force-introduction surface of the measuring body


Nominal (rated) force	F _{nom}	kN	10	20	50	100	200	300	500	1000	2000	3000	4500
Nominal (rated) displacement	S _{nom}	mm	0.13	0.11	0.13	0.17	0.19	0.23	0.26	0.45	0.62	0.79	0.98
Total weight		kg	1.2	1.2	1.2	2.3	2.3	3.9	10.4	15.3	45.6	52.6	90.4
Rel. permissible vibrational stress	F _{rb}	%	70										
Degree of protection acc. to DIN EN 60529			IP68 (test conditions 100 h at 1 m water column)										
Cable length, four-wire connection		m	5										
Measuring body material			stainless steel										

10 kN – 50 kN

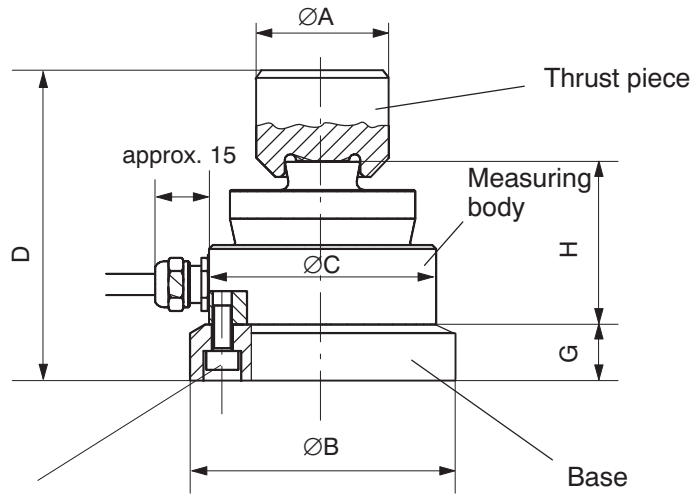


4 x screws M5 x 12

100 kN – 4.5 MN

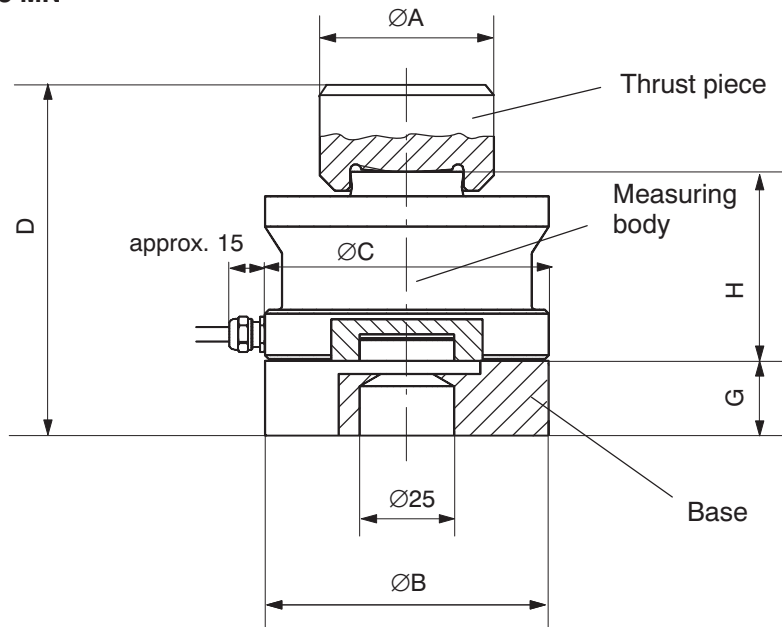

Type	Ø A	Ø B	Ø C	D	G	H
C18 / 10kN ... 50kN	35	70	60	72	15	43
C18 / 100kN ... 200 kN	45	75	75	89	20	50
C18 / 300kN	58	95	95	112	20	65
C18 / 500kN	85	130	130	157	37	85
C18 / 1MN	100	150	150	171	40	90
C18 / 2MN	135	230	225	239	50	130
C18 / 3MN	135	230	225	254	50	145
C18 / 4.5MN	160	275	270	303	60	170

Pin assignment

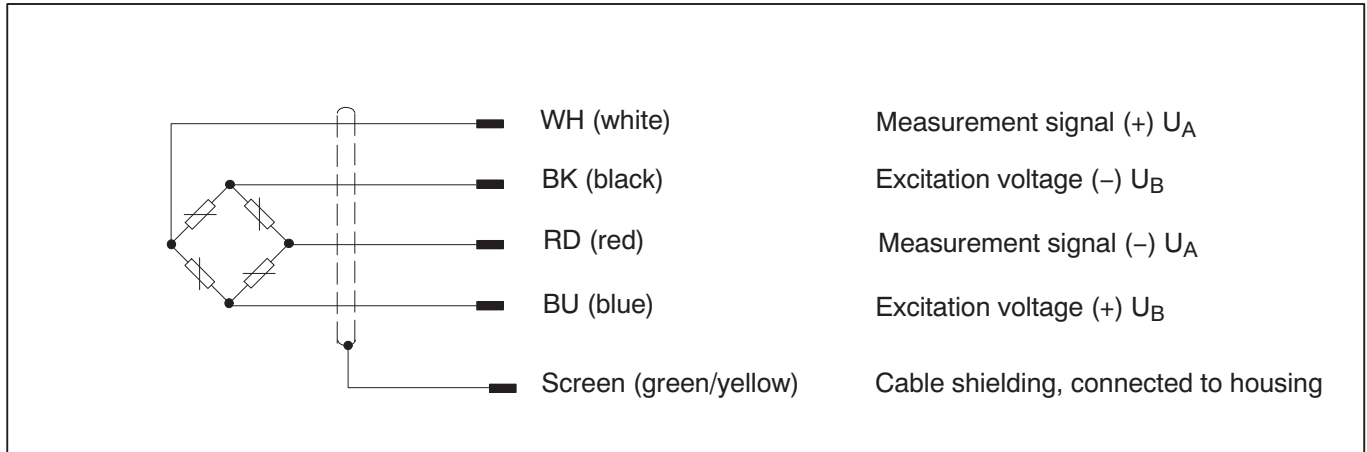

Scope of supply:

C18 measuring body
Thrust piece
Base

Regional Distributor



803, Riqqa Palace Building
Al-Maktum Ave.
P.O.Box 181802 Dubai, UAE
Tel: +9714 - 2270081
Fax: +9714 - 2239962
E-mail: rcsco@eim.ae
www.rcs-co.com

Hottinger Baldwin Messtechnik GmbH

Im Tiefen See 45, D-64293 Darmstadt, Germany
Tel.: +49 6151 8030; Fax: +49 6151 803 9100
E-mail: support@hbm.com www.hbm.com



measurement with confidence