



SK5, SK6, SK12

Slipring Assemblies

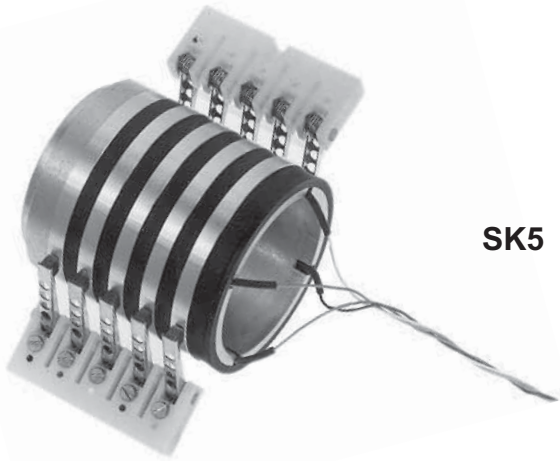

SK5

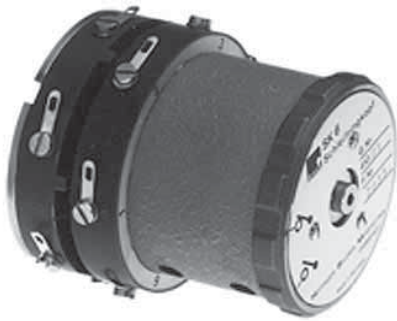


SK6


Special features

- Low wear
- High transmission quality
- SK 6 and SK 12 for mounting to stub shafts with easy-lift brush assemblies
- SK 5 for central mounting on shafts
- Low thermal voltages
- Very low change in contact resistance


Slipring Heads SK 6 and SK 12

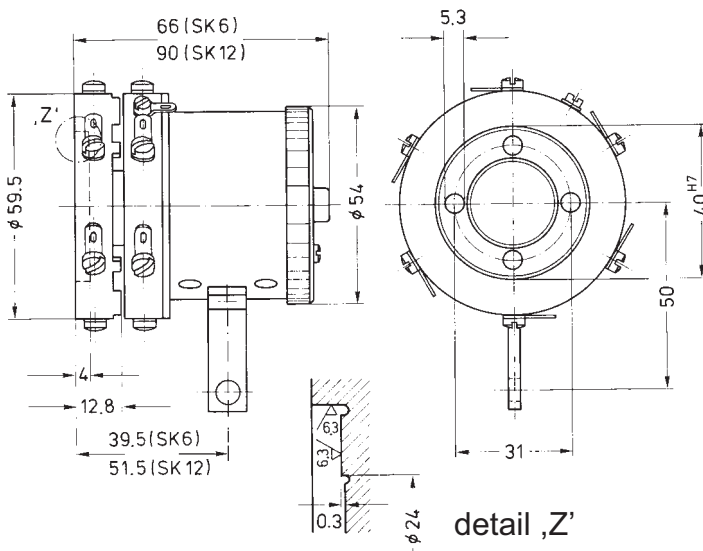

Mounting plate

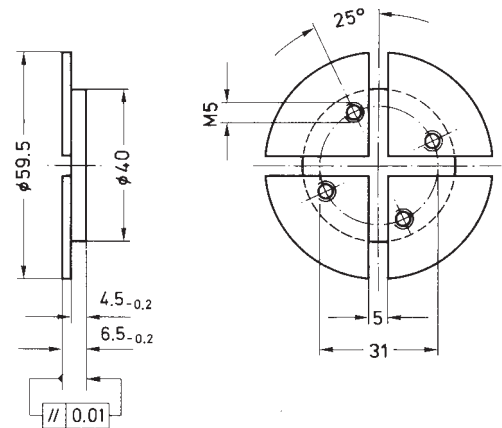

Dimensions (in mm, 1mm = 0.03937inches)

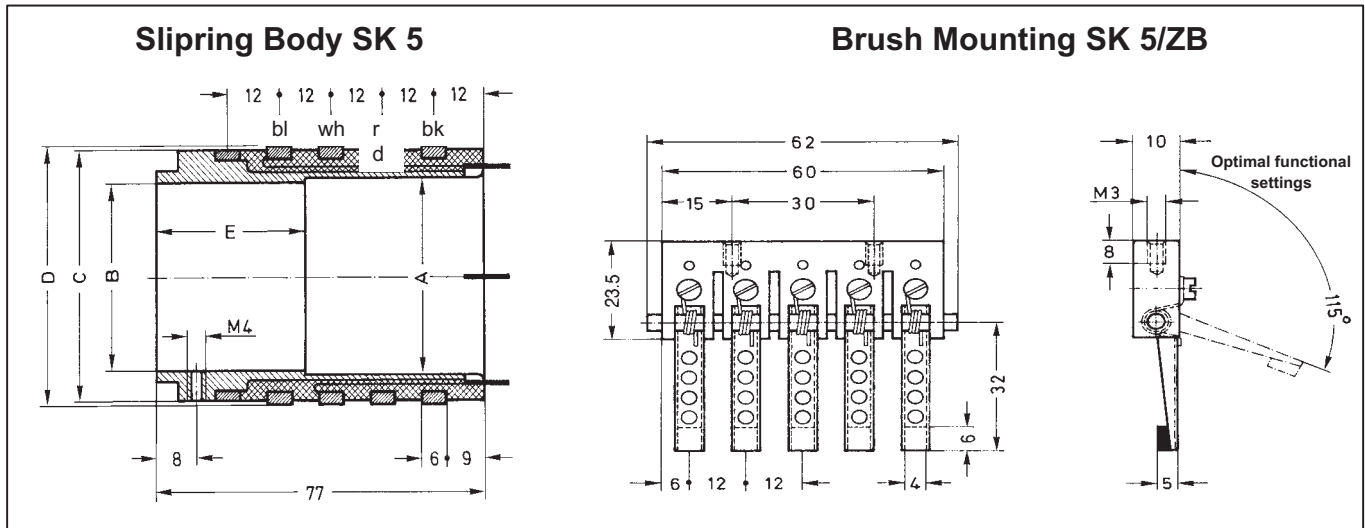

Type	Max. shaft- \varnothing in mm	Dimensions in mm					Weight in kg	Permissible speed in min^{-1}	
		$\varnothing B$	$\varnothing A$	$\varnothing C$	$\varnothing D$	E		Continuous operation	Short-term operation
SK 5/40	40	40 ^{M6}	42	54	55	35	0,23	6000	8000
SK 5/55	55	55 ^{M6}	55,1	68	69	40	0,31	6000	8000
SK5/95	95	95 ^{N6}	95,1	115	116	40	0,67	4000	6000

Specifications

Type		SK 5	SK 6	SK 12
Number of slippings		5	6	12
Resistance between slippings and brush	$\text{m}\Omega$	<40	<40	<40
Fluctuation of the resistance	$\text{m}\Omega$	<2	<2	<2
Thermo-electric voltage measured between two brushes when the slippings are short-circuited (after running warm)	μV	<10	<10	<10
Voltage limit	V	60	60	60
Current limit	A	2	2	2
Permitted speed for continuous duty	min^{-1}	4000/6000 ¹⁾	6000	6000
Permissible vibration , Test severity to DIN 40046, Part 8				
Frequency range	Hz	10...55	5...65	5...65
Duration	h	1.5	0.5	0.5
Acceleration	m/s^2	50	150	150
Mechanical schocktest ²⁾ Test severity to DIN 40046, Part 26				
Number of schocks		1000	1000	1000
Duration	ms	3	3	3
Acceleration	m/s^2	150	200	200
Moment of mass inertia , I_x (axial)	gm^2		0.082	0.087
Nominal temperature range ³⁾	$^{\circ}\text{C}$	-10...+60	-10...+60	-10...+60
Service temperature range ⁴⁾	$^{\circ}\text{C}$	-10...+90	-10...+70	-10...+70
Storage temperature range	$^{\circ}\text{C}$	-50...+90	-50...+90	-50...+90
Weight	kg	see above	approx. 0.55	approx. 0.65

1) 4000 min^{-1} for SK5/95, 6000 min^{-1} for SK5/40 and SK5/55

2) No change in technical data was observed after the schock test.

3) Permissible ambient temperature = $(60 - 0,002 \cdot n) ^{\circ}\text{C}$; n in min^{-1}

4) Permissible ambient temperature = $(70 - 0,002 \cdot n) ^{\circ}\text{C}$; n in min^{-1}

Regional Distributor



803, Riqqa Palace Building
Al-Maktum Ave.
P.O.Box 181802 Dubai, UAE
Tel: +9714 - 2270081
Fax: +9714 - 2239962
E-mail: rcscsco@eim.ae
www.rcs-co.com

Hottinger Baldwin Messtechnik GmbH

Im Tiefen See 45, D-64293 Darmstadt, Germany
Tel.: +49 6151 8030; Fax: +49 6151 803 9100
E-mail: support@hbm.com www.hbm.com



measurement with confidence